


- 6.5" OF FULL RANGE SPEAKER DESIGN
- NEODYMIUM MAGNET, UNDERHUNG DESIGN, ALUMINUM PHASE PLUG
- VERY LOW THD(2nd AND 3rd HARMONIC DISTORTION)
- SPL=91dB / M / W, QTS=0.46
- BAMBOO FIBER PAPER CONE WITH DURABLE STRUCTURED SANTOPRENE SURROUND

6.5" PAPER FULL RANGE



DIAPHRAGM MTL	Paper
SURROUND MTL	Structured Santoprene
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1m	91 dB
FREQUENCY RESPONSE	60 - 20K Hz
FREE AIR RESONANCE	60 Hz
VOICE COIL DIAMETER	38.5 mm
AIR GAP HEIGHT	14 mm
RATED POWER INPUT	30 W
MAXIMUM POWER INPUT	60 W
FORCE FACTOR, BL	5.79 TM
MAGNET WEIGHT ( oz)	Neodymium
MOVING MASS	8.07 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	851.404 μMN <sup>-1</sup>
EFFEC.PISTON AREA	0.014 M <sup>2</sup>
Levc	0.016 mH
Zo	23 ohm
X-max	5.0 mm
Vas	23.7 Litr.
Qts	0.46
Qms	1.82
Qes	0.62

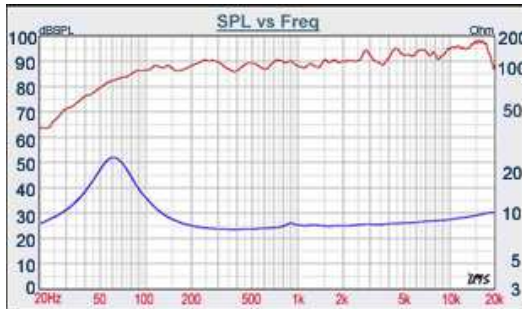

VOICE:886.2.26570282 FAX:886.2.26580166  
E-MAIL :info@tb-speaker.com

**CLOSE**