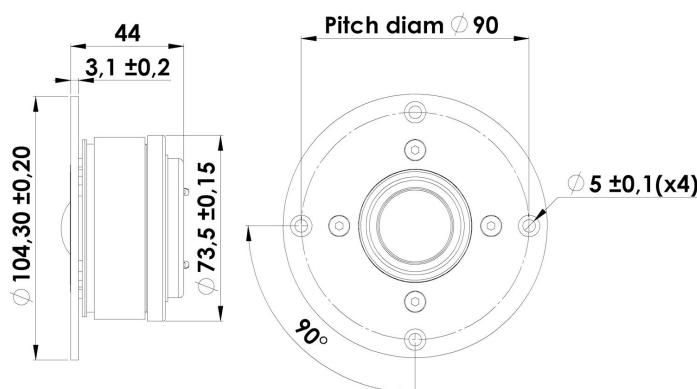


28 mm Dome Tweeter

D2905/950000


Key Features:

1" Textile Dome Diaphragm

Ferro Fluid

Low Resonance Rear Chamber

Black Painted Alu Face Plate

Recommendations (please see Tech Note):

Operating frequency range: 2500-20000 Hz

Cabinet volume - closed box: N.a.

Cabinet volume - vented box: N.a.

T-S Parameters:

Resonance frequency [fs]	550 Hz
Mechanical Q factor [Qms]	1.04
Electrical Q factor [Qes]	0.60
Total Q factor [Qt]	0.38
Force factor [Bl]	3.5 Tm
Mechanical resistance [Rms]	1.50 kg/s
Moving mass [Mms]	0.45 g
Compliance [Cms]	0.19 mm/N
Effective diaph. diameter [D]	33 mm
Effective piston area [Sd]	8.5 cm ²
Equivalent volume [Vas]	0.02 l
Sensitivity (2,83V/1m)	90 dB

Mechanical Data:

Voice coil diameter	28 mm
Voice coil height	3.3 mm
Voice coil layers	2
Gap height	2.5 mm
Linear excursion	± 0.4 mm
Max mech. excursion	± 1.5 mm
Unit weight	0.7 kg
Cabinet Displacement Volume	0.15 l

Electrical Data:

Nominal impedance [Zn]	6 Ω
Minimum impedance [Zmin]	5.5 Ω
Maximum impedance [Zo]	12.9 Ω
DC resistance [Re]	4.7 Ω
Voice coil inductance [Le]	0.07 mH

Power Handling:

100h RMS noise test (IEC 18.4) 150 W

Long-term max power (IEC 18.2) 460 W

X-over: 2. order HP Butterworth, 2.5 kHz

