



TG1/4 tweeter

SPECIFICATIONS

Bandwidth: 2500 - 20 kHz +/- 1.5 dB
Efficiency : 98 dB/W at 1m
Impedance: 4Ω
RE DC: 3.9Ω
Power max. RMS: 50 W
Resonance frequency: 1200 Hz
Diameter fixation: 100mm
Front face thickness: 5 mm
Depth: 40mm

EAN Code: 0660042796622

Dimensions & Weight
PRODUCT
 Ø 110 x H 40mm
 0.5 Kg

Dimensions (LxHxP) & Weight
PACKAGING
 140x 120 x 85mm
 0.7 Kg



The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction.


CLASSIC Series

Its objective, to maintain the philosophy of SUPRAVOX ,full range driver units and high efficiency. We work still to widen the useful bandwidth for a highest efficiency possible, while unceasingly improving the definition, the quality and the linearity. Diameter 135 to 380 mm, the audiophile can satisfy its passion.


This tweeter is equipped with a dome of 25 mm of titanium covered with gold, this in order to obtain the most rigid and light dome possible.

Thanks to a specific treatment of the dome, we kept all the qualities brought by titanium (impulse response, linearity, efficiency) and removed any metal aggressiveness in the top of the spectrum. It is been driven by a powerful neodymium magnet which enables him to reach 98 dB of output. This tweeter will surprise you by his natural reproduction, its softness, its precision and its high efficiency.


The TG1 is available in version 4 ohms (TG1/4) or 8 ohms (TG1/8).

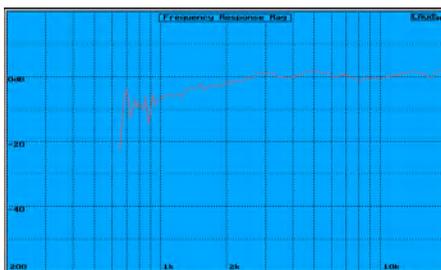


Frequency response 500Hz at 20 kHz in the axis

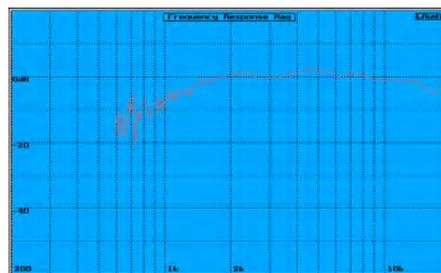

Frequency response 500Hz at 20 kHz in 30°

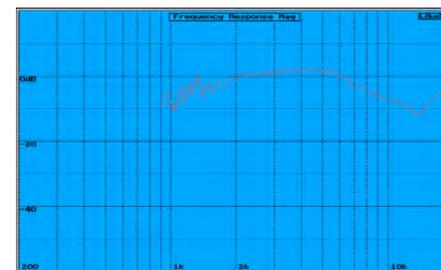

Frequency response 500Hz at 20 kHz in 60°

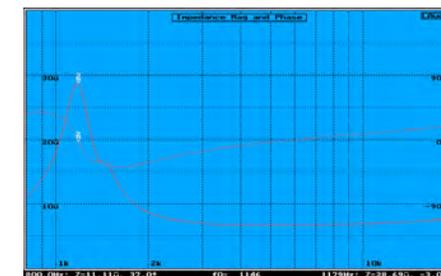

Impedance version 4 Ω

